




Quick Reference Guide

OmniLogic®

Wired Network Setup



1. Connect MSP to Home Router

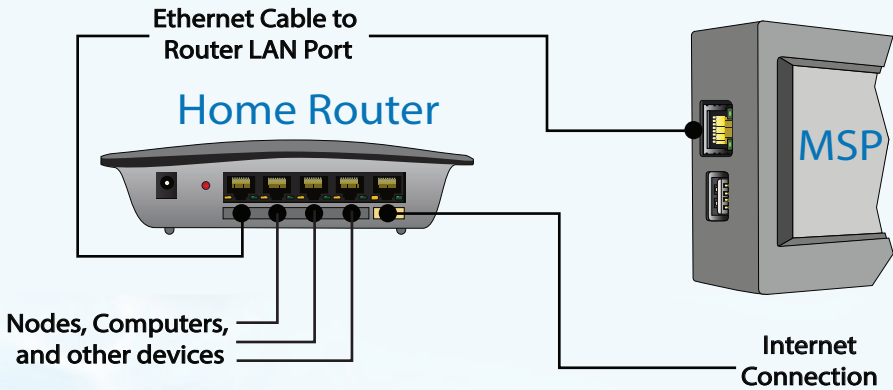

2. Configure wired connection by selecting:

Config>Wired Networking>

For dynamic (DHCP):

- select "dynamic" on text bar
- confirm and save with check mark

Note: Network status (top left) should be in "ON" position



For static (Fixed IP):

- select "static" on text bar
- enter IP for each field
- confirm and save with check mark


Note: Network status (top left) should be in "ON" position



Quick Reference Guide - Wi-Fi Bridge Setup

HLWLAN Network Setup

1. Connect HLWLAN hardware to OmniLogic

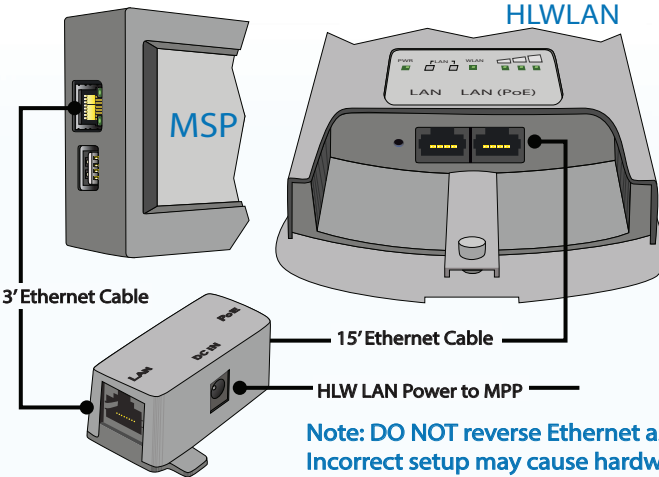

2. Configure Wi-Fi bridge by selecting Config>Wireless Config>

A. Select Wi-Fi encryption, enter SSID (network name), and Key/Password press check mark to accept

Note: SSID and Password ARE case sensitive and may be supplied by router



B. Verify IP addresses are present after connecting to WiFi, If no IPs, check information and repeat Step A

Note: It may take several minutes to connect after configuration is complete



If no IP address is issued:

- Check connection and signal strength using another WiFi ready device
- Verify network encryption through router

To view OmniLogic tutorials please visit: www.hayward.com/omnivideos

To take a closer look or see other Hayward products please go to:
www.hayward.com or call 1-844-365-6442

